

Install the drawer lock into a Rasant Shelf above a drawer. It is recommended that the Drawer Lock be installed before assembling the cabinet.

Step 1: With the front of a Rasant Shelf facing you, flip the Shelf over onto a hard surface (Keep edge banded surface to the front).

Step 2: For a 14" deep Shelf position the template (see template to the right) on the back left corner, close to the rear cam.

For a 19" deep Shelf using a 5" Drawer, move the template 5" from the back of the shelf. 19" deep Shelf with 19" deep Drawer can use this as instructed for a 14" deep Cabinet.

For 24" deep Cabinet using 19" deep Drawers, place the template 5" from the back of the shelf. If you are using 14" deep drawers in a 19" deep Cabinet then place the template 10" from the back of the Shelf.

Step 3: Mark the center of the holes with a center punch or sharp point.

Step 4: Drill the Center Hole with $\frac{3}{4}$ " Space bit or $\frac{3}{4}$ " Hole Saw all the way through the shelf.


TIP: To avoid the material chipping, drill from one side just until the tip of the drill bit pokes through. Then, continue drilling the hole from the other side.

Step 5: Drill two mounting holes on the bottom of the shelf with a $\frac{3}{16}$ " drill bit. Drill approximately $\frac{3}{8}$ " deep. **Be careful not to drill through the shelf.**

Step 6: Insert the O-Ring from the top, and insert the Lock Cylinder from the bottom, securing the O-Ring around the Lock Cylinder.

Step 7: Secure the lock from the bottom with 2 Euro screws (included).

Installed Lock should be in the back right corner of the shelf when the cabinet is assembled.

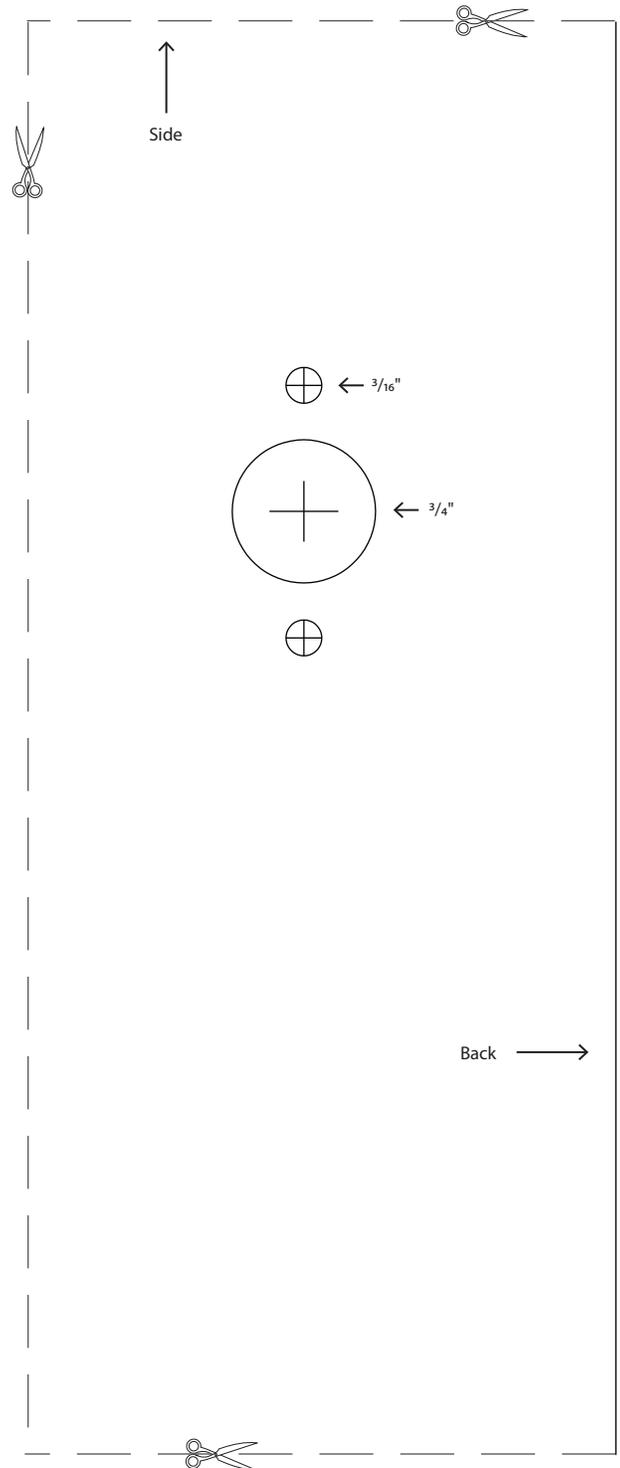

(For 19" deep Shelf with 5" deep Drawer and 24" deep Cabinet with 19" deep Drawers, move this line 5" from rear of shelf. If you are using 14" deep Drawers in a 24" deep Cabinet, move this line 10" from rear of shelf.)