




Soft Close Glide Installation




Tools

Installing Glides:	Cutting down cleat for bottom cabinet installation:
3/16" Drill Bit #2 Driver Bit 9.6V or higher cordless drill Level Pencil	Circular saw Tape measure Straight edge


New soft close glides for Classica drawers are another high quality solution that you can expect from Organized Living. The soft close glides provide effortless and soundless closes, perfect for the luxurious feeling created by your Classica closet. To mount the Soft Close Glides on a Classica panel, first find the hole location where the drawer will be installed then draw a level line in the center of that hole to the back of the panel. This can be determined by using the Classica Installation Manual as a resource and is the same as the installation for a regular drawer glide. Install the front of the Glide into the hole pattern drilled into the panel with a euro screw, as you see here. Align the hole in the back of the glide to the level line and mark the location. Then you will need to drill a 3/16" hole into the back of the panel to support the back of the glide. Once that additional hole is there, you can mount the drawer glide by using a Euro screw.

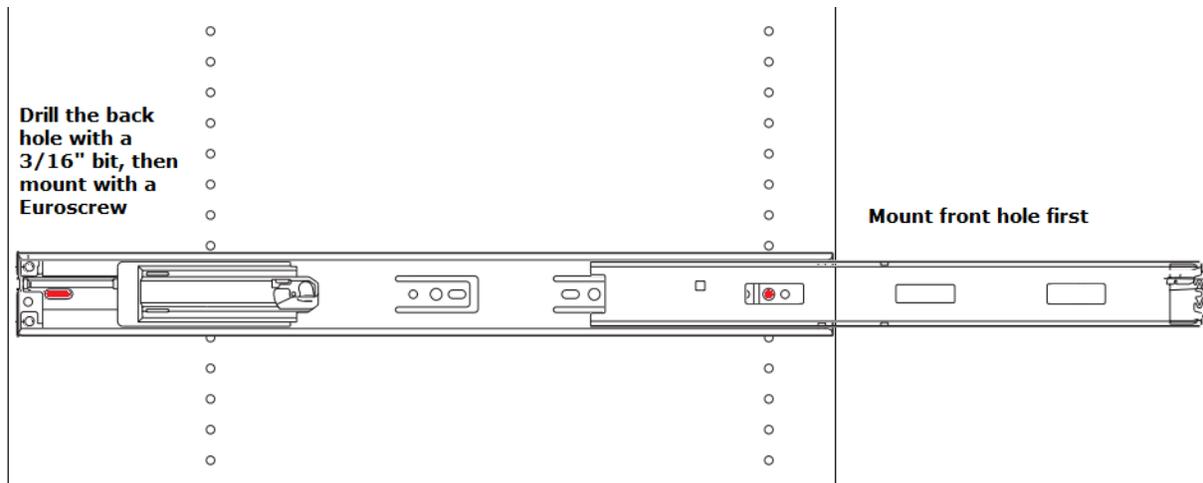

After the drawer glide is on the panel, you will also need to install the slide on the drawer box. Mount the rear of the drawer slide into the existing hole with a euroscrew. Then, center the front oblong hole on the front hole of the drawer box. With that alignment in place, drill a 3/16" hole through the existing hole on the drawer slide just in front of the oblong hole. Then you can mount the front of the drawer slide with a euroscrew. Repeat the drawer slide installation on the other side of the drawer box. Now that all pieces are in place, the drawer slides on the drawer box will easily slide into the glides on the Classica panel.

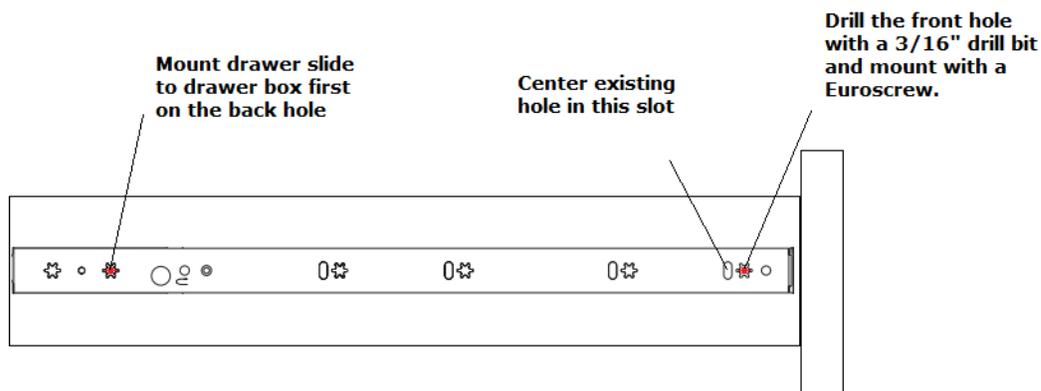

Because the soft close glides are longer than our standard glides and longer than the depth of the drawer box, you have to follow different installation instructions when the drawer sits in front of a cleat. Before you build either the wall mount or floor mount cabinet, cut the bottom cleat in half horizontally for installation. Do not install the top left and right connecting bolts for the bottom cleat because it will also interfere with the Soft Close Glide. Then you can attach the cut down cleat to the wall by drilling new holes that are centered vertically and 2 and a half inches from each side. Now that the new cleat is in place, then the glides can be installed as instructed.

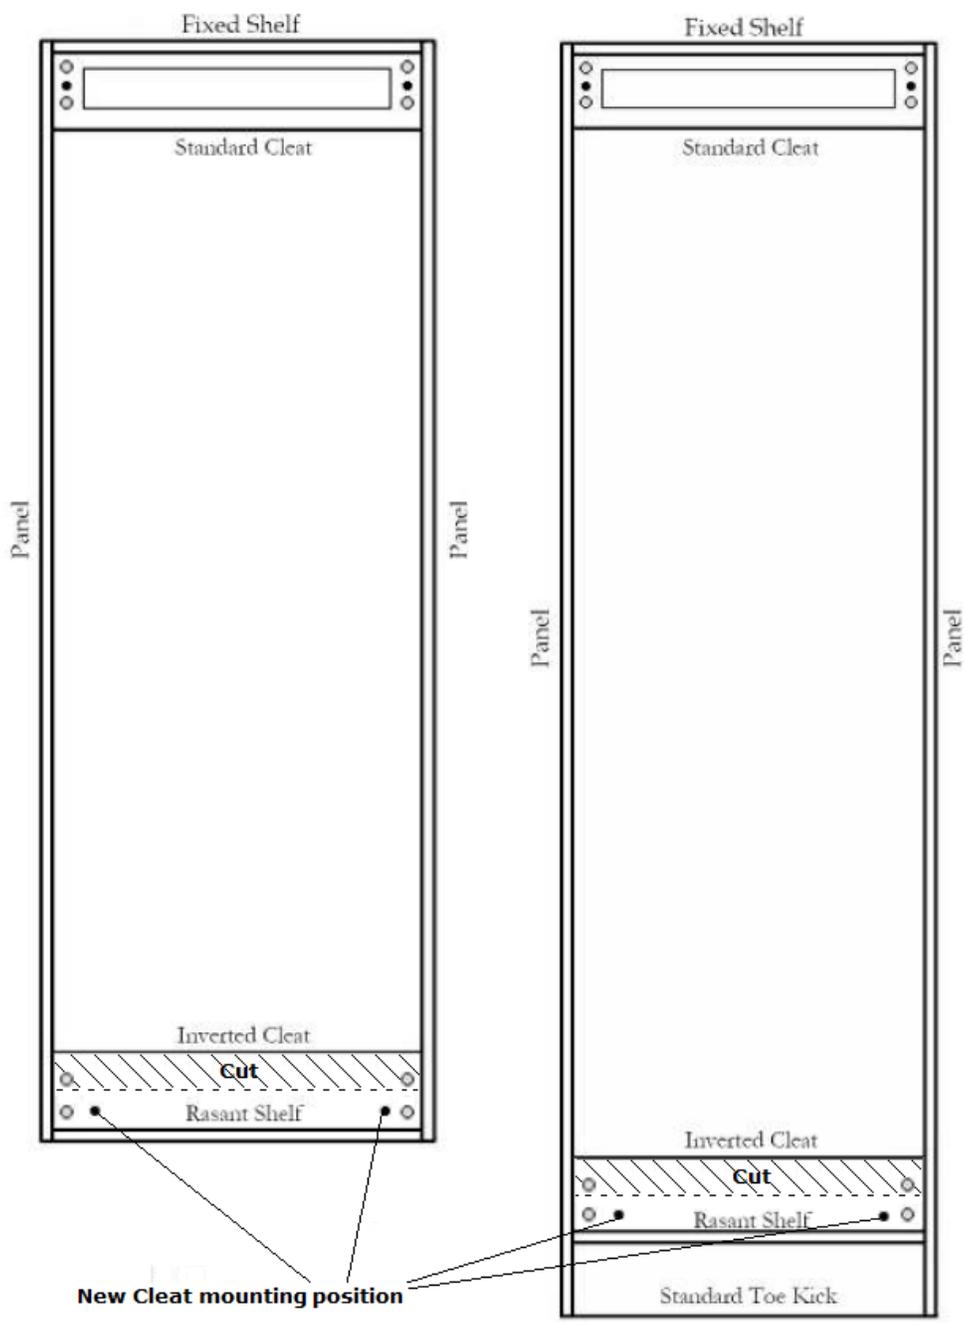

New Cleat mounting position